


PLAN VIEW


1" = 50'




PROFILE

	MIN.	MAX.
A	1-5/8"	2-3/8"
B	5/8"	1-1/2"
C	7/16"	3/4"
D	7/8"	1-7/16"
E	1-1/2"	2-1/2"

TRUNCATED DOME  
DETECTABLE WARNING PATTERN  
DETAIL (See Note 2)

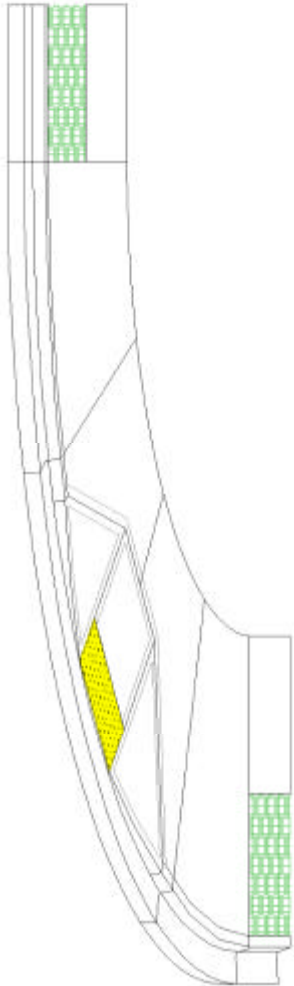

ISOMETRIC VIEW

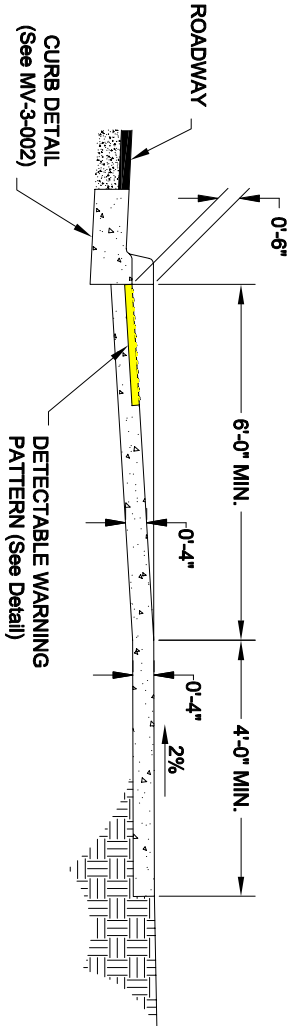

SECTION A-A

1" = 20'

NOTES

1. Avoid placing drainage structures, junction boxes or other obstructions in front of ramp access area.
2. Truncated dome detectable warning pattern shall be yellow, cast-in-place, 24"x60" panel or equal as approved by Public Works Director or their designee. [See detail for dome dimensions and spacing.]
3. See Chapter 3. "Driveways, Walks & Trails" of the MV Road Standards for details.
4. Ramp slope shall not be steeper than 12H:1V.



SIDEWALK AND CURB RAMP  
IN MINIMUM 25' RADIUS